




ヘキサロビュラ穴付きねじ仕様表

— タッピンねじ（樹脂用）（パンワッシャー） —

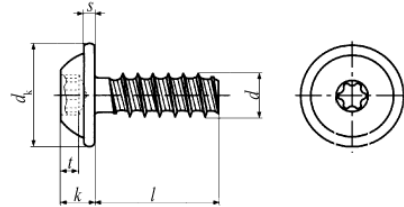

■代表品番：HLWP ■材質：鋼（三価クロメート）

d	2.2	2.5	3	4	5	6	
d_k	5	5.5	6.5	9	11	14	
k	1.6	1.9	2.3	3.1	3.5	4.2	
s	0.6	0.7	0.8	1	1.2	1.4	
t_{\min}	0.6	0.8	1	1.4	1.5	1.9	
t_{\max}	0.9	1	1.3	1.8	1.9	2.4	
工具*	X06BIP	X08BIP	X10BIP	X20BIP	X25BIP	X30BIP	
l	5	HLWP2205					
	6	HLWP2206	HLWP2506				
	8	HLWP2208	HLWP2508	HLWP3008			
	10	HLWP2210	HLWP2510	HLWP3010	HLWP4010		
	12		HLWP2512	HLWP3012	HLWP4012	HLWP5012	
	14			HLWP3014	HLWP4014	HLWP5014	HLWP6014
	16			HLWP3016	HLWP4016	HLWP5016	HLWP6016
	18			HLWP3018	HLWP4018	HLWP5018	HLWP6018
	20			HLWP3020	HLWP4020	HLWP5020	HLWP6020
	25			HLWP3025	HLWP4025	HLWP5025	HLWP6025
	30					HLWP5030	HLWP6030

* 通常のヘキサロビュラ穴用工具（代表品番：X(B)、X(L)）ではなく、トルク伝達率がより大きいヘキサロビュラ穴（IP）用工具（代表品番：X(BIP)）に適合しています。