




## ヘキサロビュラ穴付きねじ仕様表

— ボルト (超極低頭 | 鋼製 (ニッケルめっき)) —

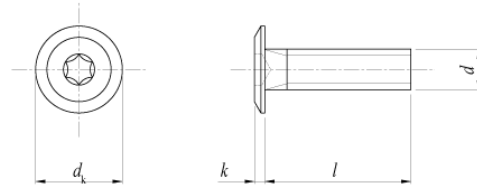

■代表品番 : SH(NI) ■材質 : SWCH ■硬度 : HV 400

| $d$   | M3  | M4       | M5       |          |
|-------|-----|----------|----------|----------|
| $d_k$ | 7   | 8        | 9        |          |
| $k$   | 0.8 | 0.9      | 1        |          |
| 穴の番号  | 6   | 8        | 10       |          |
| $l$   | 6   | SH0306NI | SH0406NI |          |
|       | 8   | SH0308NI | SH0408NI | SH0508NI |
|       | 10  | SH0310NI | SH0410NI | SH0510NI |
|       | 12  |          | SH0412NI | SH0512NI |
|       | 16  |          | SH0416NI | SH0516NI |