




いたずら防止ねじ仕様表

— トライクル (ボルト | 皿頭) —

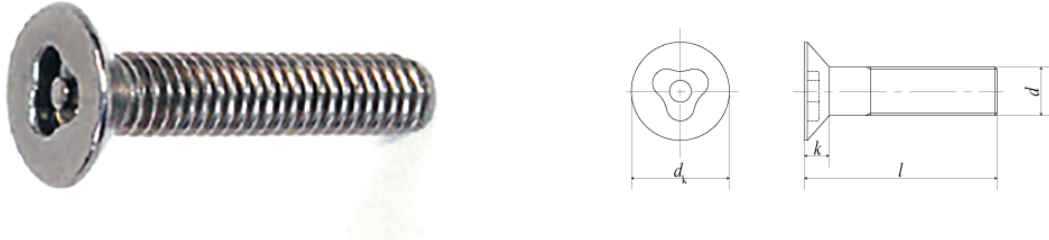

3 ロブ穴の中にピンが立つリセス形状

3 ロブの大きさが等しい A タイプと一つが小さい B タイプを用意

A タイプ

■代表品番：TC02(A) ■材質：ステンレス鋼

| d | M4 | M5 | M6 | M8 | |
|-------|-------|-----------|-----------|-----------|-----------|
| d_k | 8 | 10 | 12 | 16 | |
| k | 2.3 | 2.8 | 3.4 | 4.4 | |
| 工具 | TC04A | TC56A | TC56A | TC08A | |
| l | 6 | TC020406A | | | |
| | 8 | TC020408A | TC020508A | | |
| | 10 | TC020410A | TC020510A | TC020610A | |
| | 12 | TC020412A | TC020512A | TC020612A | TC020812A |
| | 16 | TC020416A | TC020516A | TC020616A | TC020816A |
| | 20 | TC020420A | TC020520A | TC020620A | TC020820A |
| | 25 | TC020425A | TC020525A | TC020625A | TC020825A |
| | 30 | | TC020530A | TC020630A | TC020830A |
| | 40 | | TC020540A | TC020640A | TC020840A |
| | 50 | | | TC020650A | TC020850A |

Bタイプ

■代表品番：TC02(B) ■材質：ステンレス鋼

| d | M4 | M5 | M6 | M8 | |
|-------|-------|-----------|-----------|-----------|-----------|
| d_k | 8 | 10 | 12 | 16 | |
| k | 2.3 | 2.8 | 3.4 | 4.4 | |
| 工具 | TC04B | TC56B | TC56B | TC08B | |
| l | 6 | TC020406B | | | |
| | 8 | TC020408B | TC020508B | | |
| | 10 | TC020410B | TC020510B | TC020610B | |
| | 12 | TC020412B | TC020512B | TC020612B | TC020812B |
| | 16 | TC020416B | TC020516B | TC020616B | TC020816B |
| | 20 | TC020420B | TC020520B | TC020620B | TC020820B |
| | 25 | TC020425B | TC020525B | TC020625B | TC020825B |
| | 30 | | TC020530B | TC020630B | TC020830B |
| | 40 | | TC020540B | TC020640B | TC020840B |
| | 50 | | | TC020650B | TC020850B |