



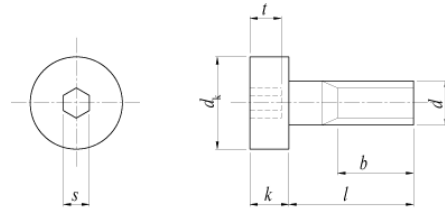

頭部の低いねじ仕様表

—低頭ボルト（六角穴付き | 鋼製（三価クロメート））—

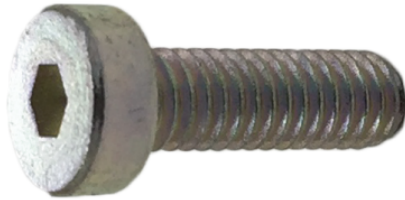

■代表品番：3LH ■材質：S45C ■強度区分：8.8

d	M2	M2.5	M3	M4	M5	M6	M8	M10	
d_k	3.8	4.5	5.5	7	8.5	10	13	16	
k	1.3	1.6	2	2.8	3.5	4	5	6	
s	1.3	1.5	2	2.5	3	4	5	6*1	
t_{max}	0.8	0.9	1.5	2.3	2.7	3	3.8	4.5	
b			12($l=20$)	14($l=25$)	16($l \geq 30$)	18($l \geq 30$)	22($l \geq 35$)	26($l \geq 40$)	
l	5	3LH0205	3LH2505	3LH0305					
	6	3LH0206	3LH2506	3LH0306	3LH0406	3LH0506			
	8	3LH0208	3LH2508	3LH0308	3LH0408	3LH0508	3LH0608		
	10	3LH0210	3LH2510	3LH0310	3LH0410	3LH0510	3LH0610	3LH0810	
	12	3LH0212	3LH2512	3LH0312	3LH0412	3LH0512	3LH0612	3LH0812	
	14					3LH0514	3LH0614	3LH0814	
	16			3LH0316	3LH0416	3LH0516	3LH0616	3LH0816	3LH1016
	18						3LH0618	3LH0818	
	20			3LH0320	3LH0420	3LH0520	3LH0620	3LH0820	3LH1020
	25			3LH0325	3LH0425	3LH0525	3LH0625	3LH0825	3LH1025
	30			3LH0330	3LH0430	3LH0530	3LH0630	3LH0830	3LH1030
	35				3LH0435	3LH0535	3LH0635	3LH0835	3LH1035
	40				3LH0440	3LH0540	3LH0640	3LH0840	3LH1040
	45					3LH0545	3LH0645	3LH0845	3LH1045
	50					3LH0550	3LH0650	3LH0850	3LH1050
	60							3LH0860	3LH1060
	70								3LH1070
80								3LH1080	
90									

*1 M10 の製品は二面幅 $s=7$ も承ります。

■代表品番：3LH ■材質：S45C ■強度区分：8.8

d	M12	M16	M20	M24	
d_k	18	24	30	36	
k	7	9	11	13	
s	8	12	14	17	
t_{max}	5	5.5	7.5	8	
b	30($l \geq 50$)	38($l \geq 60$)	46($l \geq 70$)	54($l \geq 90$)	
l	5				
	6				
	8				
	10				
	12				
	14				
	16				
	18				
	20	3LH1220			
	25	3LH1225			
	30	3LH1230	3LH1630		
	35	3LH1235	3LH1635		
	40	3LH1240	3LH1640	3LH2040	3LH2440
	45	3LH1245	3LH1645		
	50	3LH1250	3LH1650	3LH2050	3LH2450
	60	3LH1260	3LH1660	3LH2060	3LH2460
	70	3LH1270	3LH1670	3LH2070	
80	3LH1280	3LH1680	3LH2080	3LH2480	
90				3LH2490	