




頭部の低いねじ仕様表

—低頭ボルト（六角穴付き | 鋼製（黒染））—

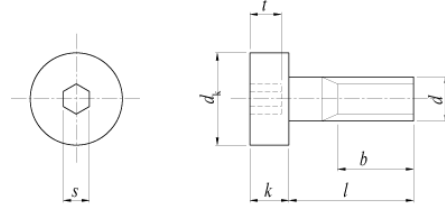

■代表品番：LH ■材質：S45C ■強度区分：8.8

d	M2	M2.5	M3	M4	M5	M6	M8	M10	
d_k	3.8	4.5	5.5	7	8.5	10	13	16	
k	1.3	1.6	2	2.8	3.5	4	5	6	
s	1.3	1.5	2	2.5	3	4	5	6 ^{*1}	
t_{max}	0.8	0.9	1.5	2.3	2.7	3	3.8	4.5	
b			12($l=20$)	14($l=25$)	16($l \geq 30$)	18($l \geq 30$)	22($l \geq 35$)	26($l \geq 40$)	
l	5	LH0205	LH2505	LH0305					
	6	LH0206	LH2506	LH0306	LH0406	LH0506			
	8	LH0208	LH2508	LH0308	LH0408	LH0508	LH0608		
	10	LH0210	LH2510	LH0310	LH0410	LH0510	LH0610	LH0810	
	12	LH0212	LH2512	LH0312	LH0412	LH0512	LH0612	LH0812	
	14					LH0514	LH0614	LH0814	
	16			LH0316	LH0416	LH0516	LH0616	LH0816	LH1016
	18						LH0618	LH0818	
	20			LH0320	LH0420	LH0520	LH0620	LH0820	LH1020
	25			LH0325	LH0425	LH0525	LH0625	LH0825	LH1025
	30			LH0330	LH0430	LH0530	LH0630	LH0830	LH1030
	35				LH0435	LH0535	LH0635	LH0835	LH1035
	40				LH0440	LH0540	LH0640	LH0840	LH1040
	45					LH0545	LH0645	LH0845	LH1045
	50					LH0550	LH0650	LH0850	LH1050
	60							LH0860	LH1060
	70								LH1070
80								LH1080	
90									

*1 M10 の製品は二面幅 $s=7$ も承ります。

■代表品番：LH ■材質：S45C ■強度区分：8.8

d	M12	M16	M20	M24
d_k	18	24	30	36
k	7	9	11	13
s	8	12	14	17
t_{max}	5	5.5	7.5	8
b	30($l \geq 50$)	38($l \geq 60$)	46($l \geq 70$)	54($l \geq 90$)
l	5			
	6			
	8			
	10			
	12			
	14			
	16			
	18			
	20	LH1220		
	25	LH1225		
	30	LH1230	LH1630	
	35	LH1235	LH1635	
	40	LH1240	LH1640	LH2040
	45	LH1245	LH1645	
	50	LH1250	LH1650	LH2050
	60	LH1260	LH1660	LH2060
70	LH1270	LH1670	LH2070	
80	LH1280	LH1680	LH2080	
90			LH2490	