




頭部の低いねじ仕様表

— 低頭ボルト（六角穴付き | ステンレス鋼製） —

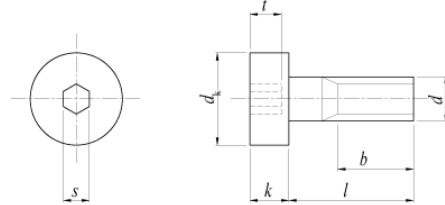

■ 代表品番 : SLH ■ 材質 : A2 (JIS B 1054-1 鋼種区分)

d	M2	M2.5	M3	M4	M5	M6	M8	M10	
d_k	3.8	4.5	5.5	7	8.5	10	13	16	
k	1.3	1.6	2	2.8	3.5	4	5	6	
s	1.3	1.5	2	2.5	3	4	5	6	
t_{max}	0.8	0.9	1.5	2.3	2.7	3	3.8	4.5	
b			12($l=20$)	14($l=25$)	16($l \geq 30$)	18($l \geq 30$)	22($l \geq 35$)	26($l \geq 40$)	
l	5	SLH0205	SLH2505	SLH0305					
	6	SLH0206	SLH2506	SLH0306	SLH0406				
	8	SLH0208	SLH2508	SLH0308	SLH0408	SLH0508	SLH0608		
	10	SLH0210	SLH2510	SLH0310	SLH0410	SLH0510	SLH0610	SLH0810	
	12	SLH0212	SLH2512	SLH0312	SLH0412	SLH0512	SLH0612	SLH0812	
	16			SLH0316	SLH0416	SLH0516	SLH0616	SLH0816	SLH1016
	20			SLH0320	SLH0420	SLH0520	SLH0620	SLH0820	SLH1020
	25			SLH0325	SLH0425	SLH0525	SLH0625	SLH0825	SLH1025
	30				SLH0430	SLH0530	SLH0630	SLH0830	SLH1030
	35					SLH0535	SLH0635	SLH0835	SLH1035
	40					SLH0540	SLH0640	SLH0840	SLH1040
	45						SLH0645	SLH0845	SLH1045
	50						SLH0650	SLH0850	SLH1050
	60							SLH0860	SLH1060
70								SLH1070	
80								SLH1080	

■代表品番：SLH ■材質：A2（JIS B 1054-1 鋼種区分）

d	M12	
d_k	18	
k	7	
s	8	
t_{max}	5	
b	30($l \geq 50$)	
l	5	
	6	
	8	
	10	
	12	
	16	
	20	SLH1220
	25	SLH1225
	30	SLH1230
	35	SLH1235
	40	SLH1240
	45	
	50	SLH1250
	60	
	70	
80		