

## 低頭小頭ボルト


概要 ステンレス鋼製

詳細 ■材質：A2（JIS B 1054-1 鋼種区分）

■駆動部の形状：六角穴

代表品番

**KSLH**

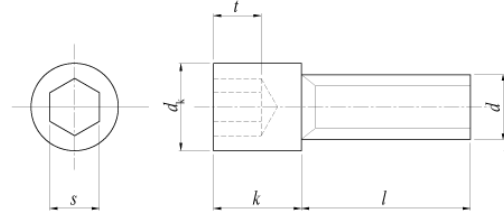

$d$	M3	M4	M5	M6	M8	M10	M12	
$d_k$	4.5	5.5	7	8.5	10	13	16	
$k$	2	2.8	3.5	4	5	6	7	
$s$	2	2.5	3	4	5	6	8	
$t_{max}$	1.5	2.3	2.7	3	3.8	4.5	5	
$l$	5	KSLH0305						
	6	KSLH0306	KSLH0406	KSLH0506				
	8	KSLH0308	KSLH0408	KSLH0508	KSLH0608			
	10	KSLH0310	KSLH0410	KSLH0510	KSLH0610	KSLH0810		
	12		KSLH0412	KSLH0512	KSLH0612	KSLH0812		
	16		KSLH0416	KSLH0516	KSLH0616	KSLH0816	KSLH1016	
	20		KSLH0420	KSLH0520	KSLH0620	KSLH0820	KSLH1020	KSLH1220
	25				KSLH0625	KSLH0825	KSLH1025	KSLH1225
	30					KSLH0830	KSLH1030	KSLH1230
	35						KSLH1035	